
BOMATEC
MORE THAN JUST MAGNETS

BMNpi-70/80

Bonded NdFeB compressed, isotropic (EP)

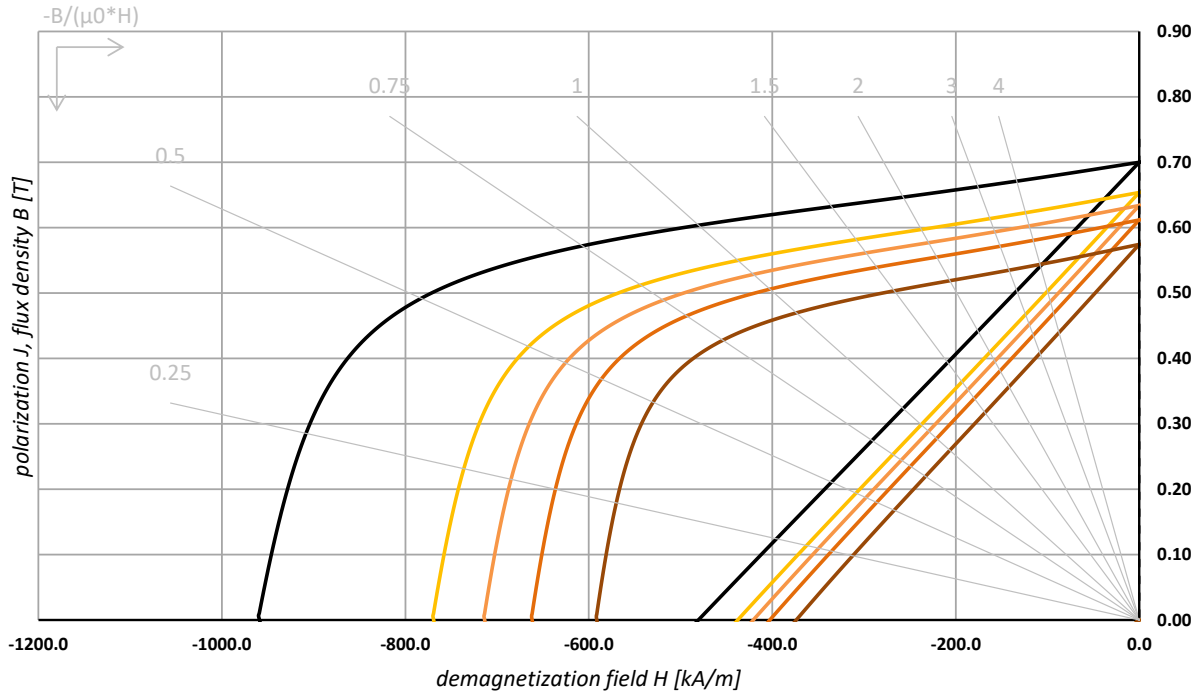

Temperature in [°C]: **20.0** 80.0 100.0 120.0 150.0

magnetic properties

Remanence 20°C	Br min	0.660	T	6.6	kG
	Br nom	0.700	T	7.0	kG
Coercitivity 20°C	HcB min	440	kA/m	5.5	kOe
	HcB nom	480	kA/m	6.0	kOe
Intrinsic Coercitivity 20°C	HcJ min	800	kA/m	10.1	kOe
	HcJ nom	960	kA/m	12.1	kOe
Maximum Energy Product 20°C	BH max, min	70	kJ/m^3	8.8	MGOe
	BH max, nom	83	kJ/m^3	10.4	MGOe
Reversible Temperature Coefficient [1)]	α Br nom	-0.10 ~ -0.15	%/°C		
	β HcJ nom	-0.28 ~ -0.34	%/°C		

material properties (typical values)

Max. Operating Temperature [2)]	T max	160	°C		
Density	ρ	6.15	g/cm^3		
Permeability 20°C	μr	1.20 - 1.25			
Vickers Hardness		35 - 45	HV		
Modulus of Elasticity	E	8 - 16	kN/mm^2		
Compressive Strength		-	N/mm^2		
Flexural Strength		50-100	N/mm^2		
Expansion Coefficient		10.0 - 30.0	$10^{-6}/K$		
Expansion Coefficient in direction of anisotropy	⊥	-	$10^{-6}/K$		
	//	-	$10^{-6}/K$		
Specific Electric Resistance	ρel	15 - 50	μΩ·m		
Specific Heat Capacity	c	-	J/(kg·K)		
Thermal Conductivity	λ	2	W/m·K		

1) The shown temperature coefficients are nominal reference values only . They can vary for different temperatures and don't need to be linear.

2) The maximum operating temperature is depending on the magnet shape, size and on the specific application.

Note: The above plotted graphs are idealized and represent theoretical values of the material. Shown are curves according nominal values based on uncoated material samples according to IEC 60404-5. Material and magnetic data represent typical data that may vary due to product shape, size and coating. Please contact Bomatec regarding specific requirements for your application.

Bomatec |Hofstrasse 1 |Tel. +41 44 872 10 00 |Fax. +41 44 872 10 01 |contact@bomatec.ch | www.bomatec.com